

10/527303

5 Rec'd PCT/PTO 08 MAR 2005

DOCKET NO.: 7031P012

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of:

OSCAR SIRCOVICH

Application No.:

Filed:

For: **STAIR LIFT SYSTEM**

Art Group:

Examiner:

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

REQUEST FOR PRIORITY

Sir:

Applicant respectfully requests a convention priority for the above-captioned application, namely:

<u>COUNTRY</u>	<u>APPLICATION NUMBER</u>	<u>DATE OF FILING</u>
Israel	151654	9 September 2002

☐ A certified copy of the document is being submitted herewith.

Respectfully submitted,

Blakely, Sokoloff, Taylor & Zafman LLP

Dated: 3/8/05

12400 Wilshire Boulevard, 7th Floor
Los Angeles, CA 90025
Telephone: (310) 207-3800


Eric S. Hyman, Reg. No. 30,139

193

IL 03/00714



מדינת ישראל
STATE OF ISRAEL

10/527303

PCT/IL 03/00714
PCT/PTO 08 MAR 2005

REC'D 14 OCT 2003
WIPO PAT


Ministry of Justice
Patent Office

משרד המשפטים
לשכת הפטנטים

This is to certify that
annexed hereto is a true
copy of the documents as
originally deposited with
the patent application
of which particulars are
specified on the first page
of the annex.

זאת לתעודה כי
רצופים בזה העתקים
נכונים של המסמכים
שהופקדו לכתחילה
עם הבקשה לפטנט
לפי הפרטים הרשומים
בעמוד הראשון של
הנספח.

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

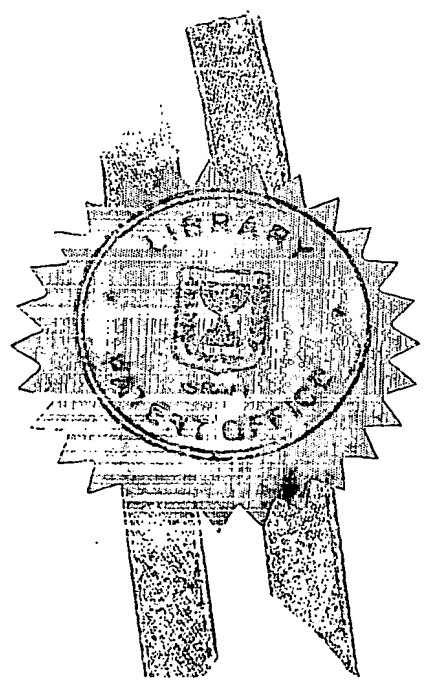

This: 03-09-2003 היום
רשם הפטנטים
Commissioner of Patents

BEST AVAILABLE COPY

נתאשר
Certified

לשימוש השלכה
For Office Use

בקשה לפטנט
Application for Patent

מספר: Number	151654
תאריך: Date	9-09-2002
הוקדם/נדחה: Ante/Post-dated	

אני (שם המבקש, מענו ולגבי גוף מאוגד – מקום התאגדותו)

I (name and address of Applicant, and in case of body corporate, place of incorporation)

Oscar Sircovich
29 Harakevet Street
Jerusalem 93502
ISRAEL

אוסקר סירקוביץ
רחוב הרכבת 29
ירושלים 93502

בעל אמצאה מכח היותי הממציא ששמה הוא
Owner by virtue of being the inventor Of an invention the title of which is

מערכת להעלאת מדרגות


בעברית
(Hebrew)

STAIRS LIFT SYSTEM

באנגלית
(English)

hereby apply for a patent to be granted in respect thereof

מבקש בזאת שינתן לי עלה פטנט

* בקשת חלוקה Appl. For Division		* בקשת פטנט מוסף Appl. for Patent Add.		* דרישת דין קדימה Priority Claim	
מבקשת פטנט from Appl.		* לבקשה/פטנט to Patent/Appl.		מספר/סימן Number/Mark	תאריך Date
מס' dated מיום		מס' dated מיום			
P.O.A: Attached		* יפוי כח: מצ"ב			
המען למסירת מסמכים בישראל: Address for Service in Israel		דניאל פריימן, עו"ד 29814 ת.ד. תל אביב 61297			
DANIEL FREIMANN, Adv. P.O.Box 29814 Tel Aviv 61297					
On behalf of the Applicant		בשם המבקש		היום 5 לחודש 09 שנת 2002 Year Month This	
				לשימוש השלכה For Office Use	
DANIEL FREIMANN, Adv.		דניאל פריימן, עו"ד			

טופס זה כשהוא מוטבע בחותם לשכת הפטנטים ומושלם במספר ובתאריך ההגשה, הינו אישור להגשת הבקשה שפרטיה רשומים לעיל

This form, impressed with the seal of the Patent Office and indicating the number and date of filing, certifies the filing of the application the particulars of which are set out above.

מערכת להעלאת מדרגות

STAIRS LIFT SYSTEM

STAIRS LIFT SYSTEM

FIELD OF THE INVENTION

The present invention relates to elevating devices, more particularly to stairs lifting systems.

BACKGROUND OF THE INVENTION

Stair flights are the most common means for enabling individuals to climb to (or descend from) different levels in residential and other buildings. The most popular alternatives - though much more expensive and not always practicable - are elevators or escalators.

It is the object of the invention to offer a solution, particularly for the elderly or less-fit persons, who live in residential buildings, multi level apartments or family houses or moves in buildings for public uses, where retrofitting of a lift is not possible for economic or other reasons.

It is a further object of the invention to provide an array of substitutional stairs readily installable on top of any existing stair flight, converting it into a so to speak "one level walking" elevator.

The closest prior art known to Applicant are systems specially tailored for the handicapped, i.e. those who need wheelchairs - cf. US Patent No. 5,802,773.

SUMMARY OF THE INVENTION

Thus provided according to the present invention is a stairs lift system capable of converting the stairs climbing (or descending) operation into walking along a horizontal plane, the system comprising: an existing flight of stairs, a

series of lifting elements, each supported on one of the substrate stairs, thus forming together a second layer of stairs, each lifting element comprises: an open top container fitting the length, width and height of a substrate stair, a top panel forming a cover for the container, means for lifting the top panel up to the height of the substrate stair, means for activating the lifting means upon a control command, means for sensing the presence of a subject having stepped on the first-in-line lifting element top panel, means for issuing the control command to the next-in-line lifting element after the subject stepped thereover, and means for lowering the top panel of the first-in-line lifting element to the initial position once the control command has been issued.

BRIEF DESCRIPTION OF THE DRAWINGS

These and additional constructional features and advantages of the invention will become more clearly understood in the light of the ensuing description of a preferred embodiment thereof, given by way of example only with reference to the accompanying drawings, wherein -

Fig. 1 is a schematic representation of a conventional flight of stairs;

Fig. 2 illustrates the principles of the stairs lift system of the present invention;

Fig. 3 is a top view of the stairs lift system of Fig. 2;

Fig. 4 is a cross-sectional view taken along line IV-IV of Fig. 3, illustrating the use of microswitch pad as means for sensing the presence of a subject having stepped over from one to the next lifting element;

Fig. 5 is a schematic cross-sectional view of a lifting element according to a first mechanical version of the system in the withdrawn, inoperative position;

Fig. 6 is a sectional view of the element of Fig. 5 in the extended, operational position;

Fig. 7 is a schematic cross-sectional view of a lifting element according to a second mechanical version of the system in the withdrawn position;

Fig. 8 is a section view of the element of Fig. 7 in the extended position;

Fig. 9 is a sectional view taken along line IX-IX of Fig. 7;

Fig. 10 is a schematic cross-sectional view of a lifting element according to a hydraulic version of the system in the withdrawn position;

Fig. 11 is a sectional view of the element of Fig. 10 in the extended position;

Fig. 12 is similar to Fig. 4 but employing pressure transducer for indicating the passage of the user from one step to the other;

Fig. 13 is a sectional view taken along line XIII-XIII of Fig. 12; and

Fig. 14 is flow chart of the system.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

A conventional flight of stairs is illustrated in Fig. 1. Hence, a plurality of stairs 10 are usually laid on a substrate (not shown) between lower level L1 and upper level L2. Typically the height of each stair is 14-21 cm. A handrail 12 is provided for convenience and safety.

The stairs lift system generally designated 14 in Fig. 2 comprises a plurality of lifting elements 16 in the form of crates or boxes following the

measurements of and each laid on one of the substrate stairs 10, so that the same pattern of stairs is maintained.

As further seen (Fig. 3), each element 16 comprises a tread portion 16a at the side near the handrail 12, which is adapted, at the proper timing (see below), to become lifted up to the level of the adjacent, higher stair. Hence, a climbing person can simply step over to the next-in-line stair by walking along a horizontal plane, with practically no effort.

In more detail, and as one out of many design options the lifting element 16 is substantially hollow, and comprised of an outer casing 18 configured to support at one side a fixed panel 16b.

Integrated with the liftable panel 16a are a pair of sensors denoted 20. In the present example, the sensors are foot pads operatively associated with microswitches 22, the arrangement being that an electric circuit becomes closed (see also Fig. 14) only upon placing thereon both feet of the user. This arrangement is recommended as a measure of safety (see further explanation below).

A first, mechanical embodiment of a lifting mechanism will be now described with reference to Figs. 5 and 6. The left-hand compartment, below the fixed panel 116b conveniently serves a storage for an electric reversible (DC) motor 130. By screw-threaded spindle 132, the motor drives a lazy-tongs mechanism 134 comprising link 134a pivoted at one end to the base 118 and at its other end to link 134b. Link 134b is pivoted to the lifting panel 116a. Links 134c and 134d are pivoted to each other and to the links 134a and 134b as

shown, and carry rollers 136 and 138, respectively, the former being installed in a cage 140 which is linearly driven by the spindle by the screw-thread engagement.

The lifting (and lowering) of the panel 116a is clearly depicted in Fig. 6, depending on the running direction of the motor 130.

Turning now to Figs. 7-9, motor 230 is coupled to the lifting panel 216a intermediate a pulley block generally denoted 234. It comprises cable 250 slung over pulleys 252, 254, 256 and anchored against the bottom of the box 218.

The lift panel 216a is constantly urged upwards by four strong coil springs 258, by a force exceeding the maximum allowable weight (say, 100 kg.). The springs are suitably supported by telescopic tubes 260a and 260b.

Provoked by a "lifting" command of the control circuit, the motor will "let go" of the panel 216a which will start to rise under the force of the springs 258. Winding up the cable 250 will pull the panel 216a back to the initial state.

A hydraulic version of the lifting mechanism 324 is illustrated in Figs. 10 and 11. Hence, the hydraulic jack 324 is used comprising cylinder 370 and piston 372 on which the lift panel 316a is supported.

The motor 330 is coupled to an oil pump 374. The pump 374 is connected by the tube 376 to the lower side of the cylinder 370, and by tube 378 to the top side thereof. Oil is supplied by reservoir 380. Suitable check valves are installed as necessary for the lifting and lowering of the piston 372 as known *per-se* in the art.

Figs. 12 and 13 exemplify alternative means for ascertaining that a person has stepped onto the tread panel and is ready to be lifted up to the next stair (instead of using microswitches as described in conjunction with Fig. 4).

As schematically shown, piezoelectric or other known type of press gauges 490 is installed so that in the standby, withdrawn position, a measurement proportional to the weight of the person, standing on the first stair (at level L1) is received and recorded for the following series of stair liftings.

The next lifting will be enabled only after the press-gauge of such next stair indicates that the full weight of the user has in fact been shifted, namely that he left the former lifting element and is ready for the next lifting operation and the withdrawal of the panel behind.

The sequential operation of the stair lift system will be now described with reference to the flow chart of Fig. 14. The chart reflects one full cycle, namely, the lifting and then the lowering of any given tread panel by any one of the operating systems exemplified above.

The left-hand side of the diagram relates to the lifting string of operations. Hence, the control system is in standby position until positively sensing the presence of a subject (both microswitch 22 are closed, or full resting weight applied to press-gauge 490).

After a certain delay, for allowing the user to get ready for lifting, the respective motor is activated to commence the lifting stage.

Once the required level is reached (e.g. sensed by a suitable limit switch associated with the lifting panel or by other suitable means known *per-se*), the

motor is stopped and its operation delayed, either for a given time period or, advantageously for extra safety, until some time after the lifting phase of the next element has started (or even completed!). This would ensure that the user no longer depends in any way on the previously lifted panel, and is fully supported by the next element.

The sequence of stages as above described is now repeated but in the descending direction (see right hand side of the chart).

It has thus been established that the proposed invention offers a neat, relatively low cost solution to the problem at hand as described in the preamble hereto.

Those skilled in the art to which this invention pertains will readily appreciate that numerous changes, variations and modifications can be effectuated without departing from the true spirit and scope of the invention as defined in and by the appended claims.

Thus, for example, the system is readily convertible to be used for descending a flight of stairs, should the need for such use arise.

Another obvious option is to operate the system in a continuous escalator-like fashion.

The system is readily adapted to be applied to non linear flights of stairs such as in curves or of the spiral type.



WHAT IS CLAIMED IS:

1. A stairs lift system capable of converting stairs climbing (or descending) operation into walking along a horizontal plane, the system comprising:
 - An existing substrate flight of stairs; and
 - a series of lifting elements, each supported on one of the substrate stairs, thus forming together a second, overlying layer of stairs, each lifting element comprises:
 - an open top container fitting the length, width and height of a substrate stair;
 - a top panel forming a cover for the container;
 - means for lifting the top panel up to the height of a substrate stair;
 - means for activating the lifting means upon a control command;
 - means for sensing the presence of a subject having stepped on the first-in-line lifting element top panel;
 - means for issuing the control command to the next-in-line lifting element after the subject stepped thereover; and
 - means for lowering the top panel of the first-in-line lifting element to the initial position once the control command has been issued.
2. The system as claimed in Claim 1 wherein the top panel is supported on a mechanical lifting system.
3. The system as claimed in Claim 2 wherein the mechanical lifting system comprises an electric motor driving a lazy-tongs system.

4. The system as claimed in Claim 2 wherein the mechanical lifting system comprises an electric motor driving a pulley block.
5. The system as claimed in Claim 1 wherein the top panel is supported on a hydraulic cylinder and piston assembly operatively coupled to an electrically operated hydraulic pump.
6. The system as claimed in Claim 1 wherein the subject presence sensing means comprise at least one microswitch-operating pad.
7. The system as claimed in Claim 6 wherein a pair of said pads are installed, one for each foot of the user.
8. The system as claimed in Claim 1 wherein the subject presence sensing means comprises a press-gauge device adapted to be activated by the weight of the subject.
9. The system as claimed in Claim 8 further comprising means for disabling the issuance of the control command subject to the transition of said weight to the next-in-line lifting element.

For the Applicant


Daniel Freimann, Adv.

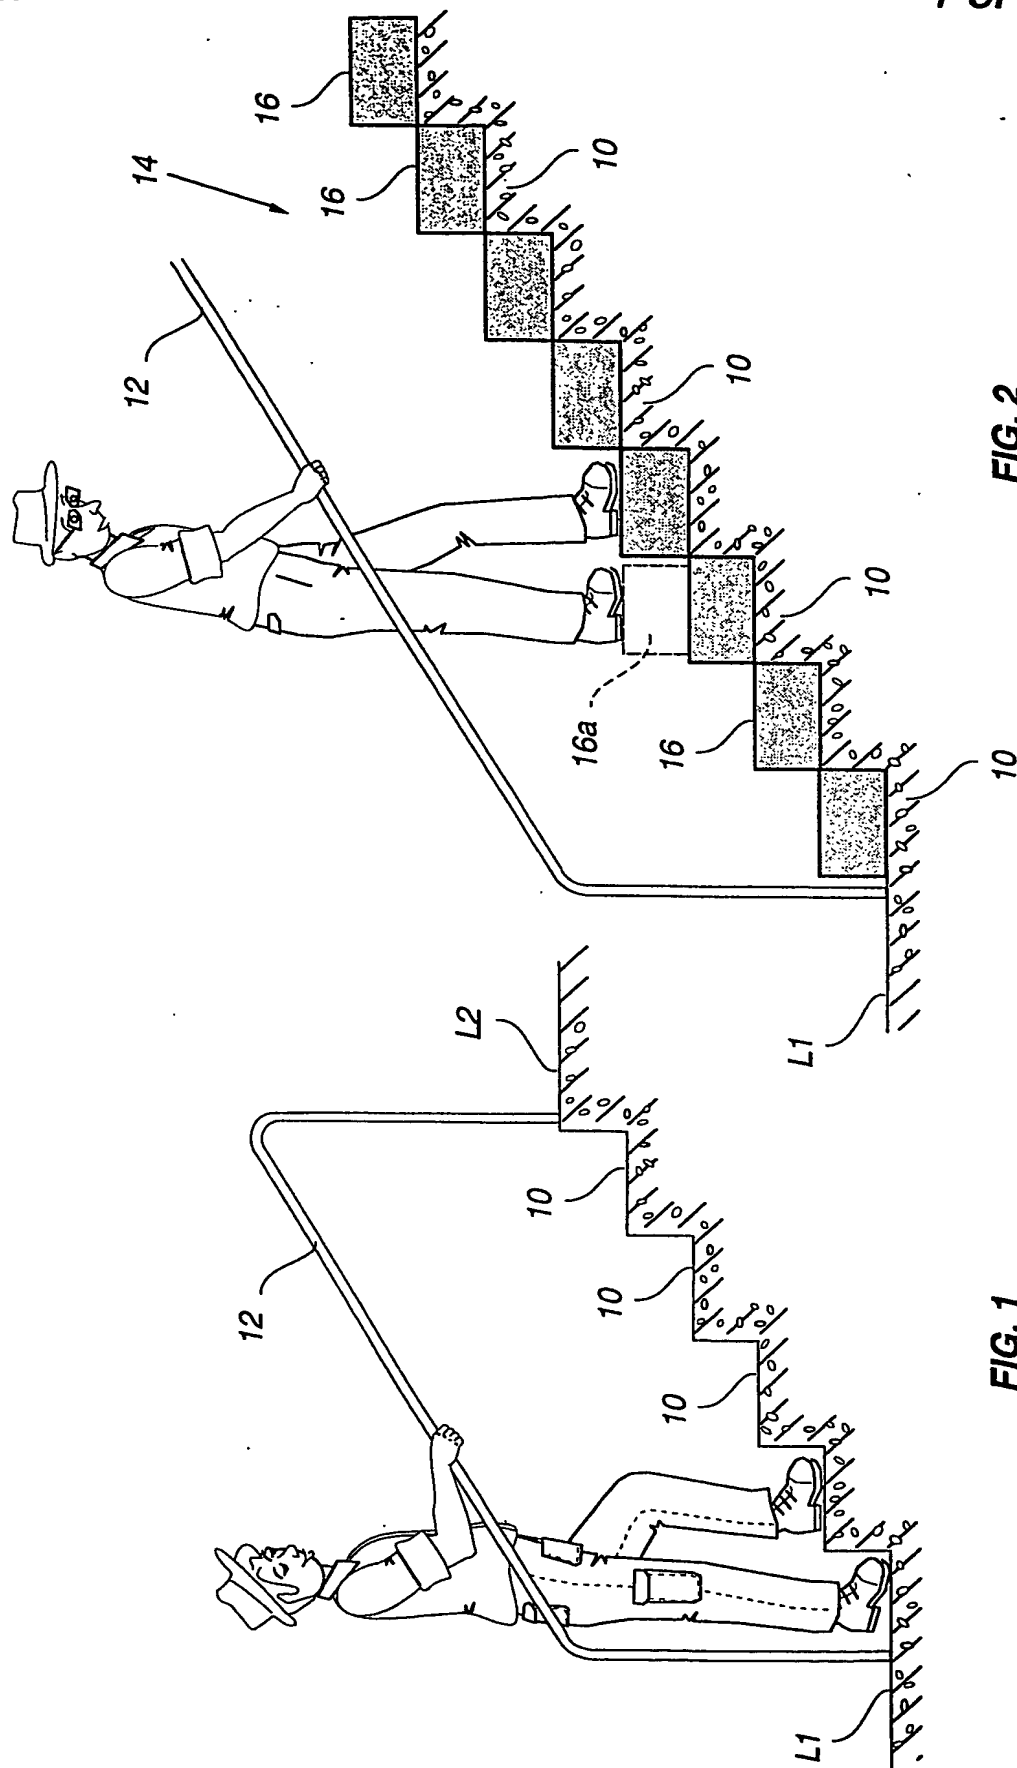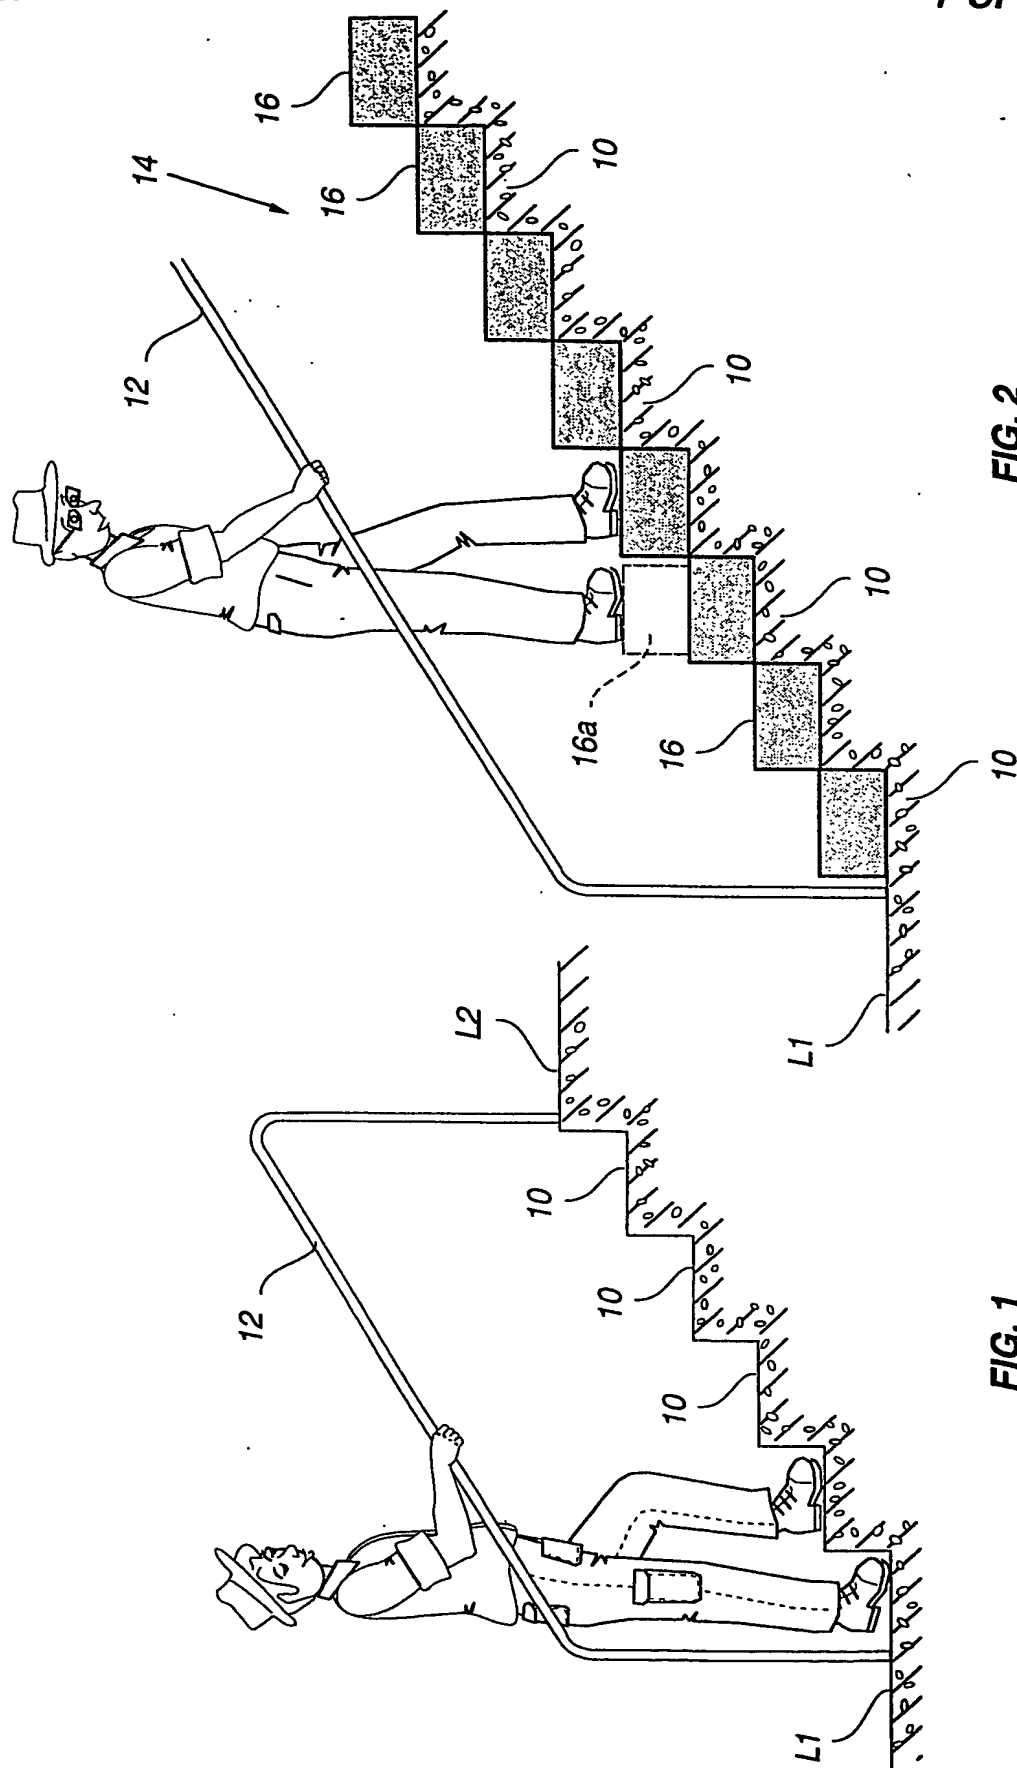

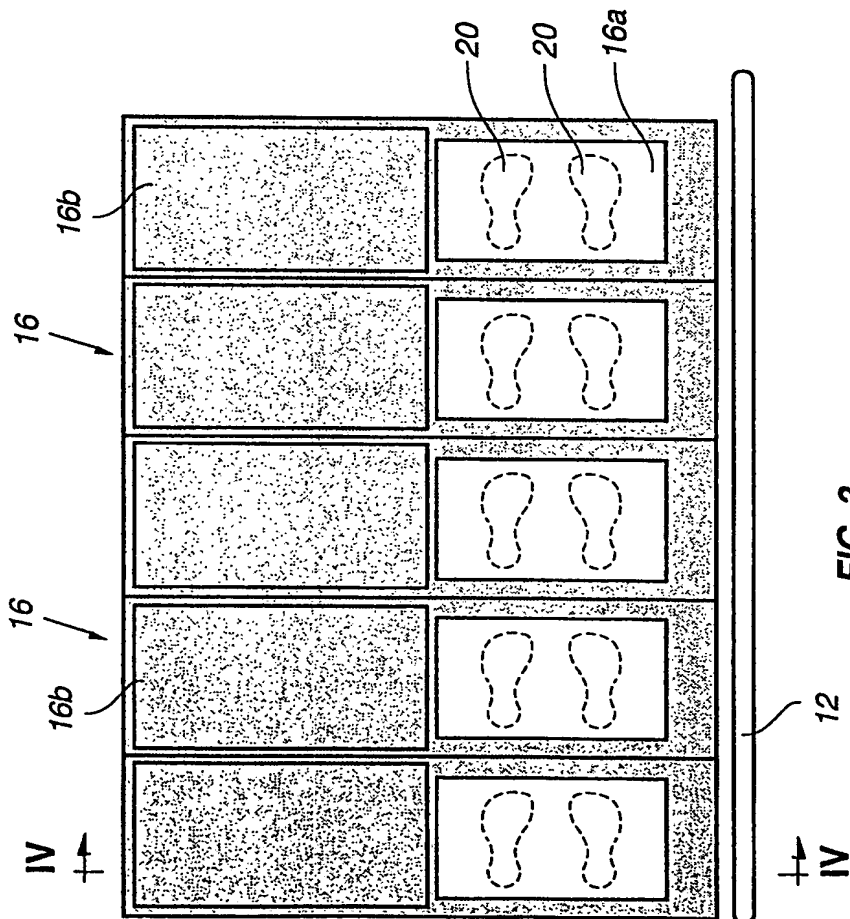


FIG. 3

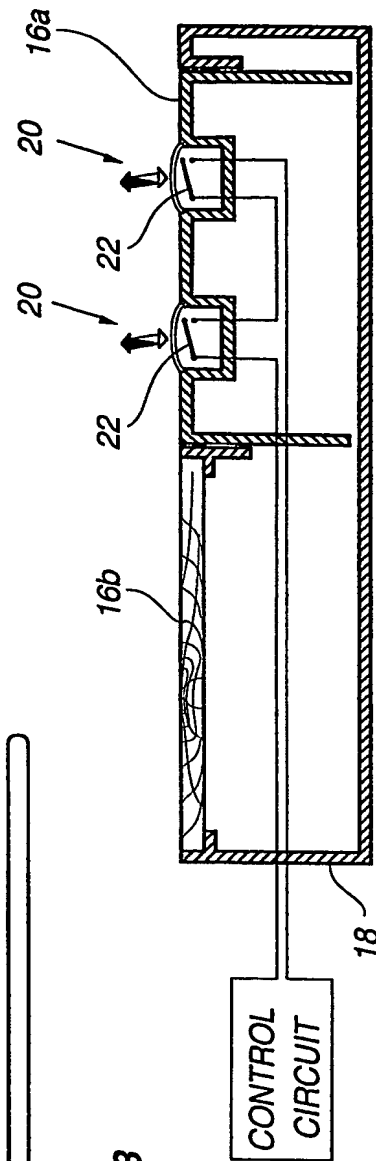
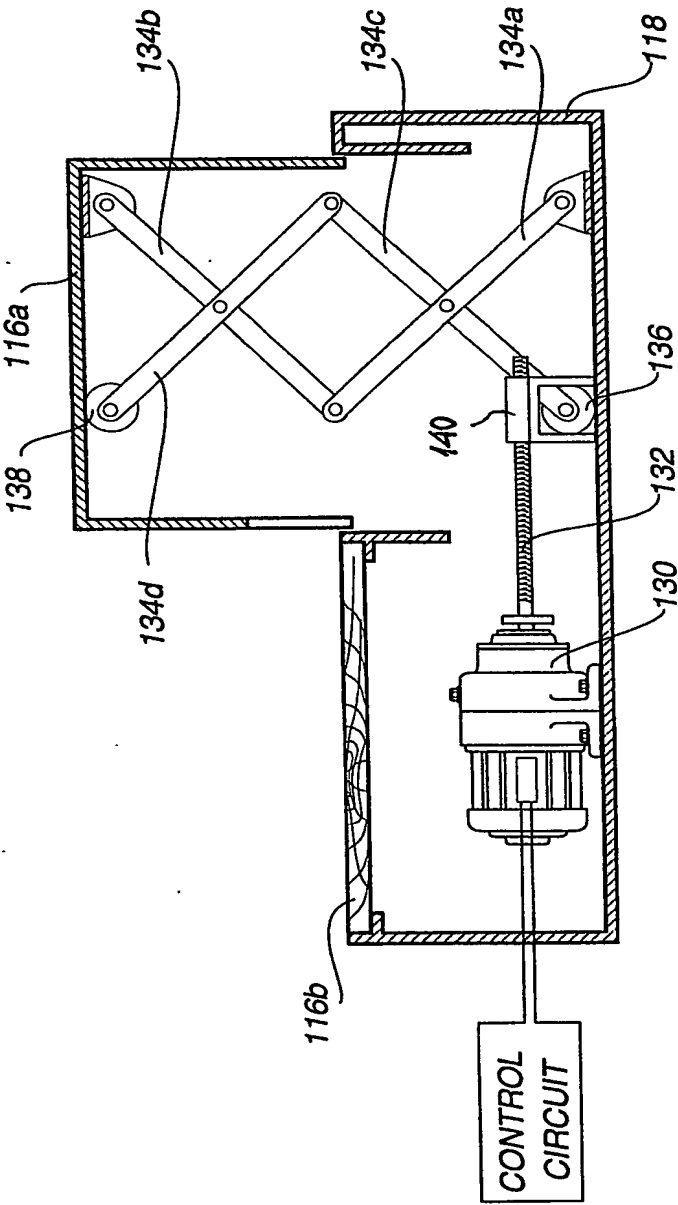
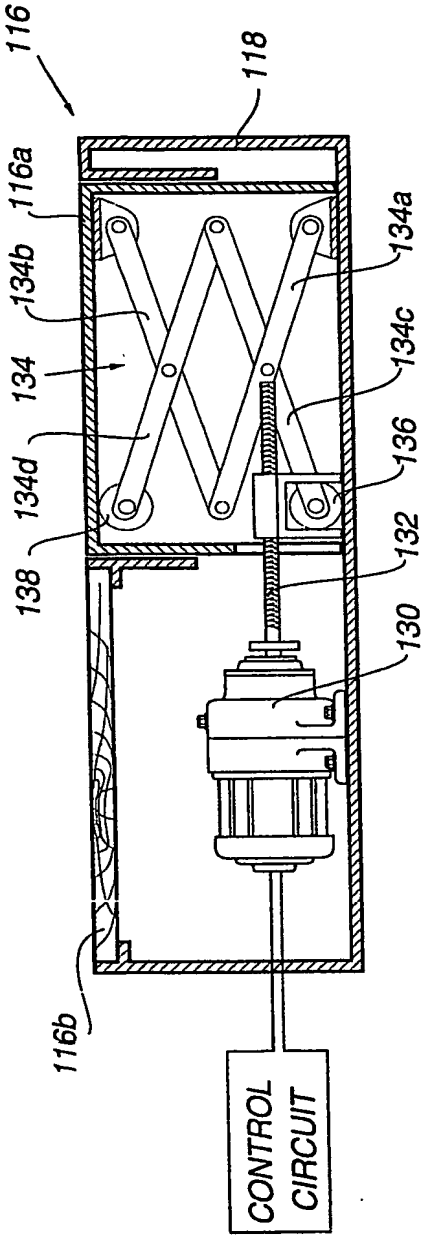
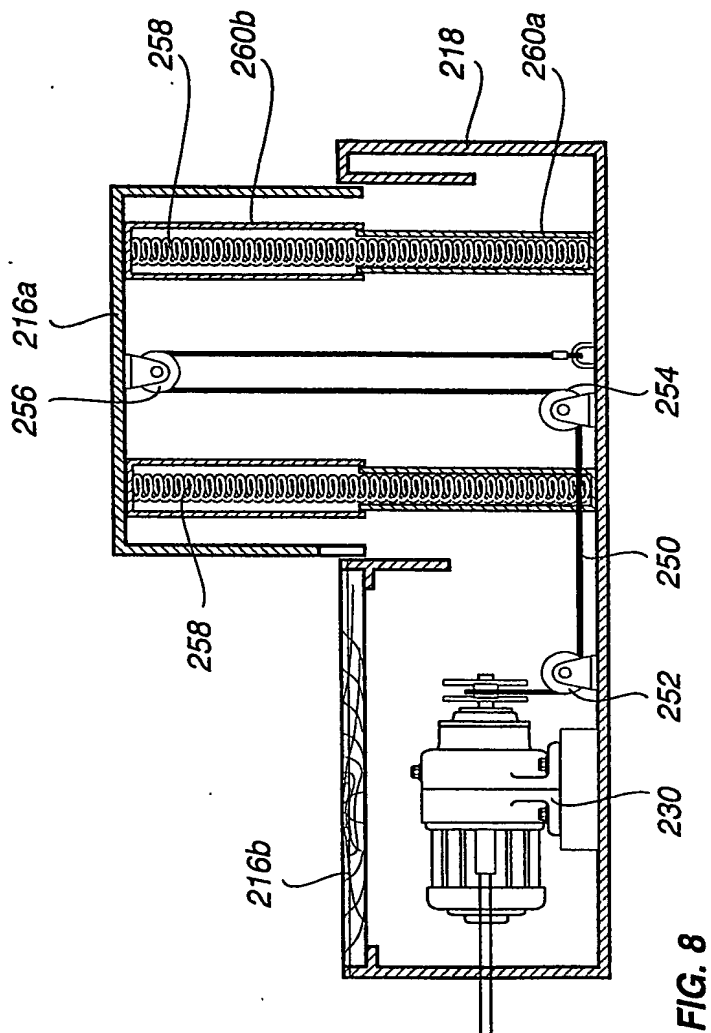
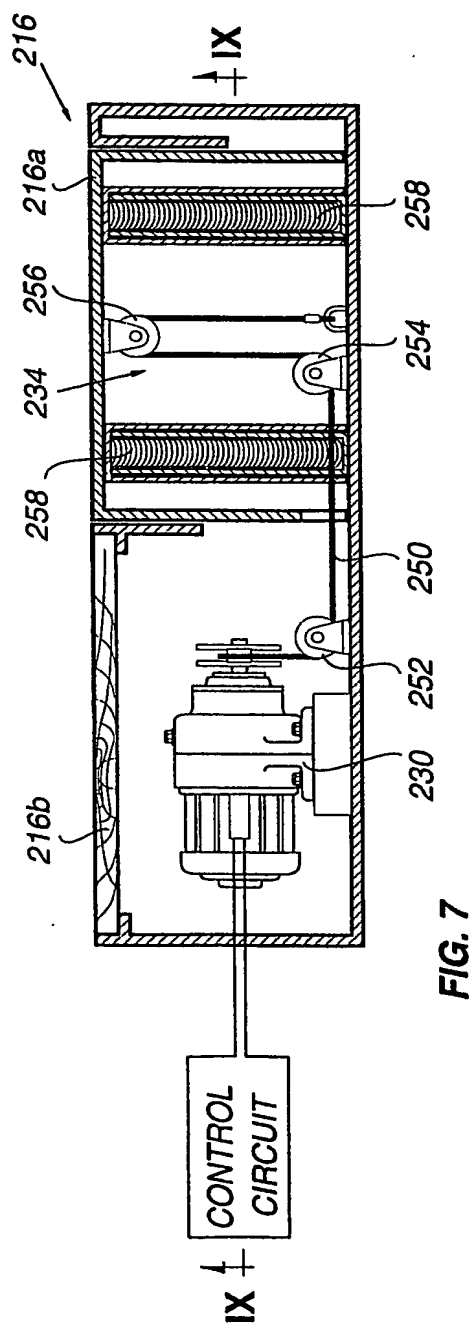


FIG. 4





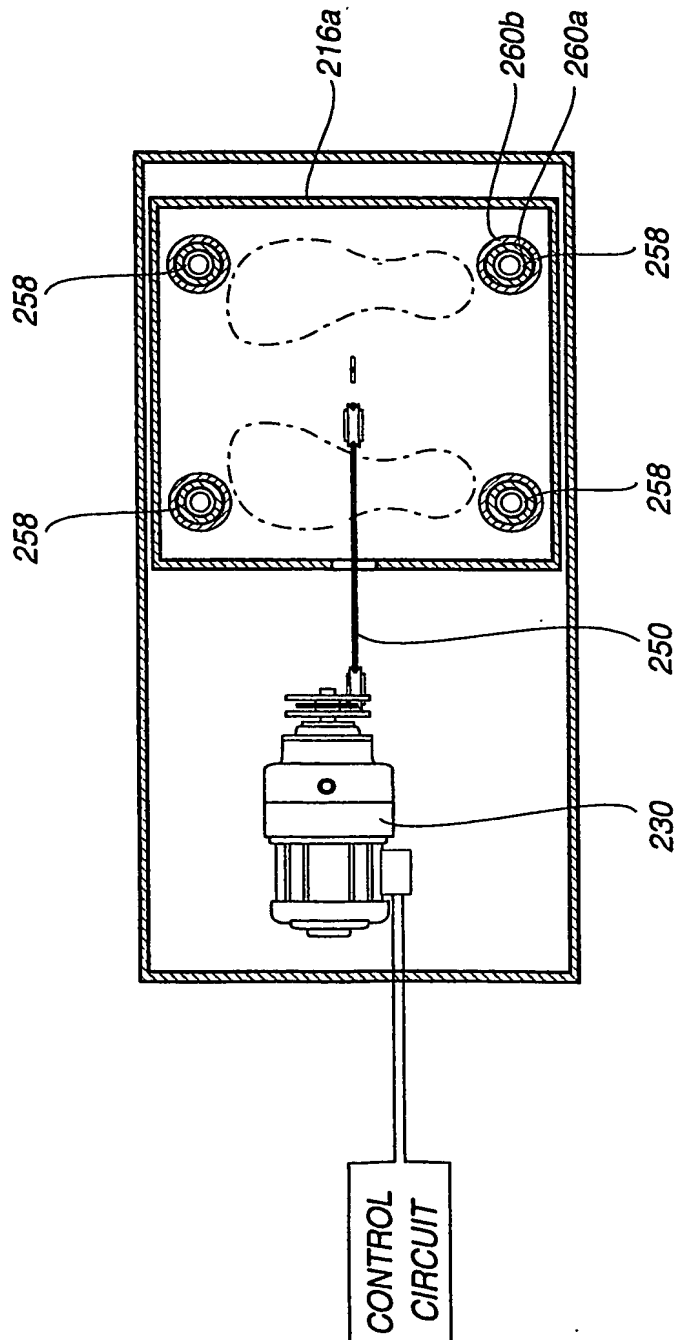


FIG. 9

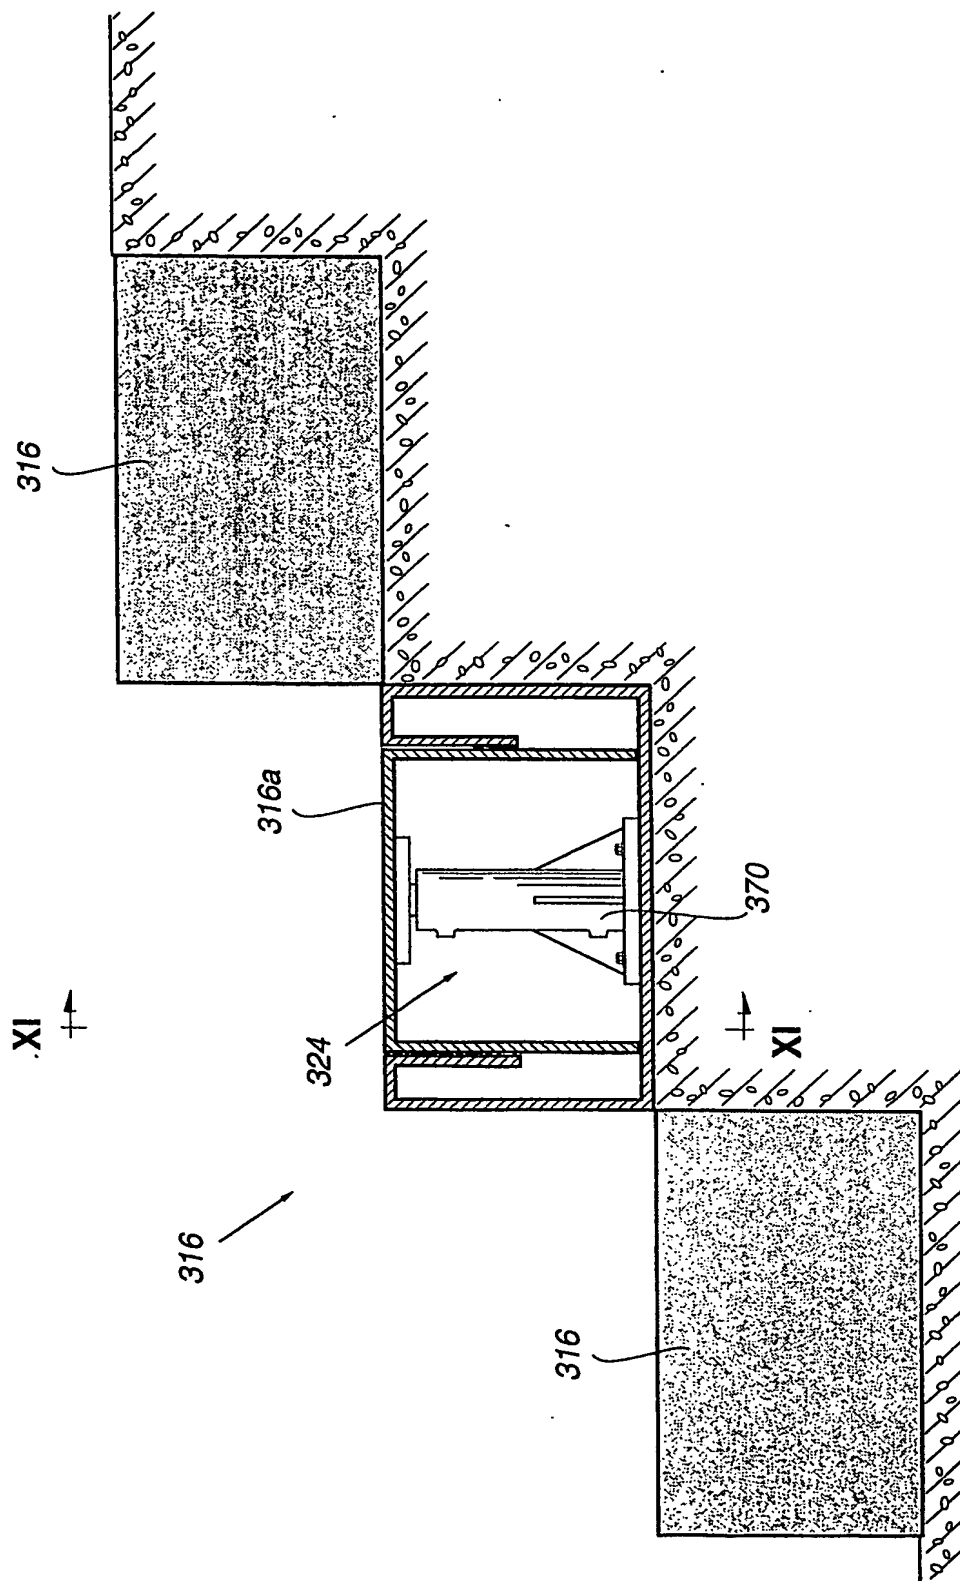


FIG. 10

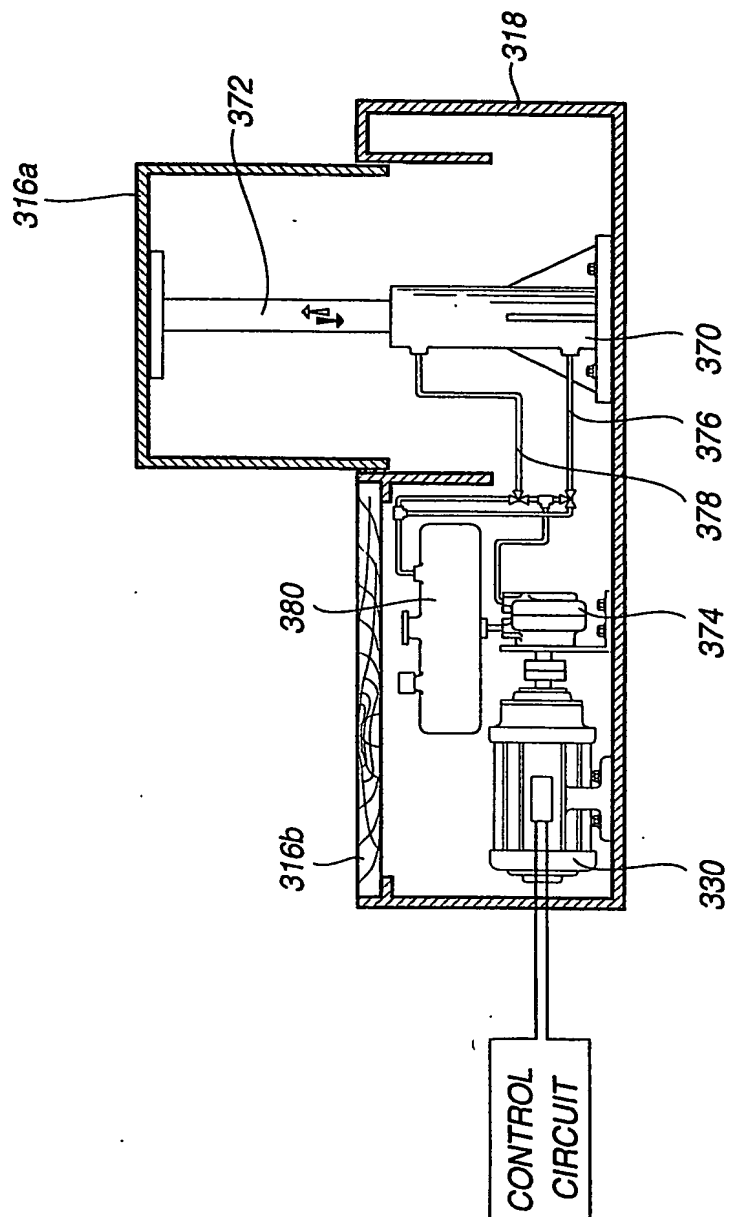


FIG. 11

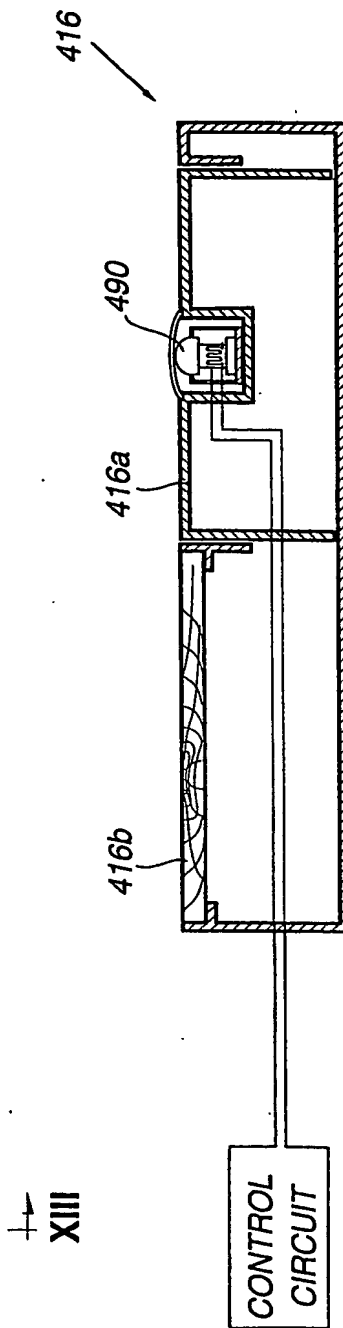
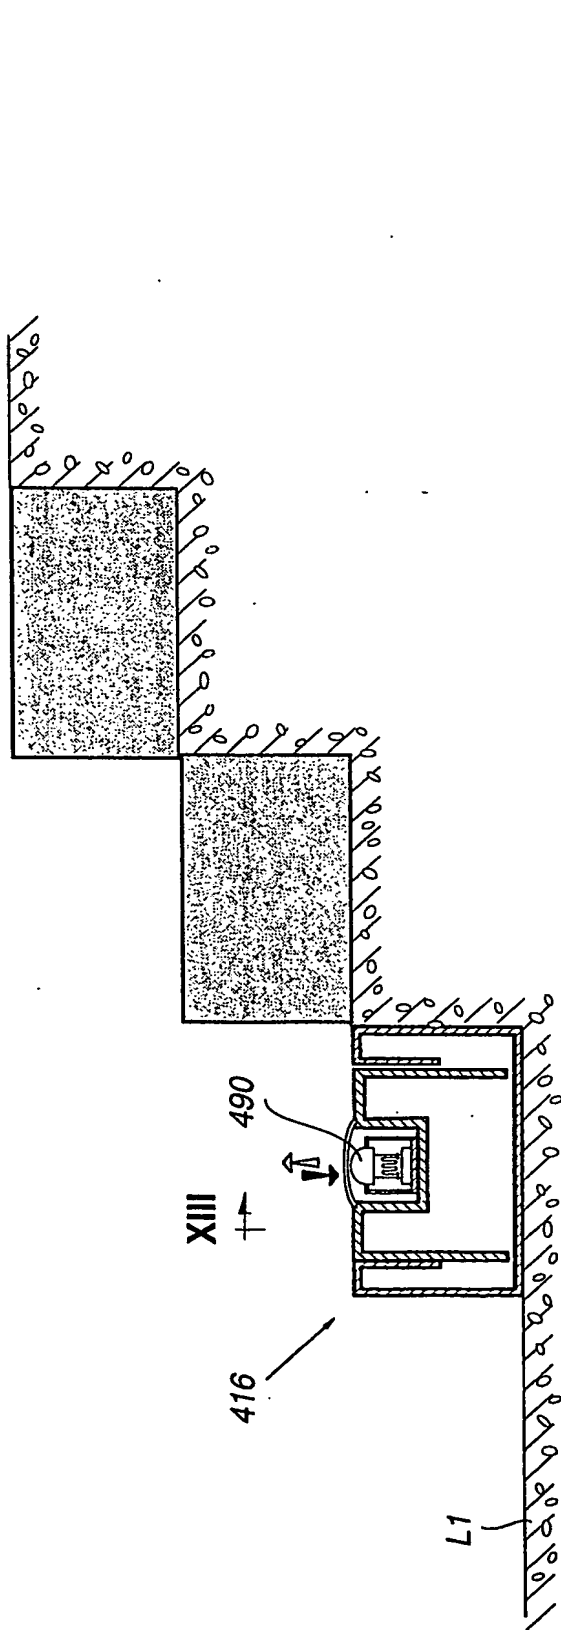


FIG. 13

FIG. 12

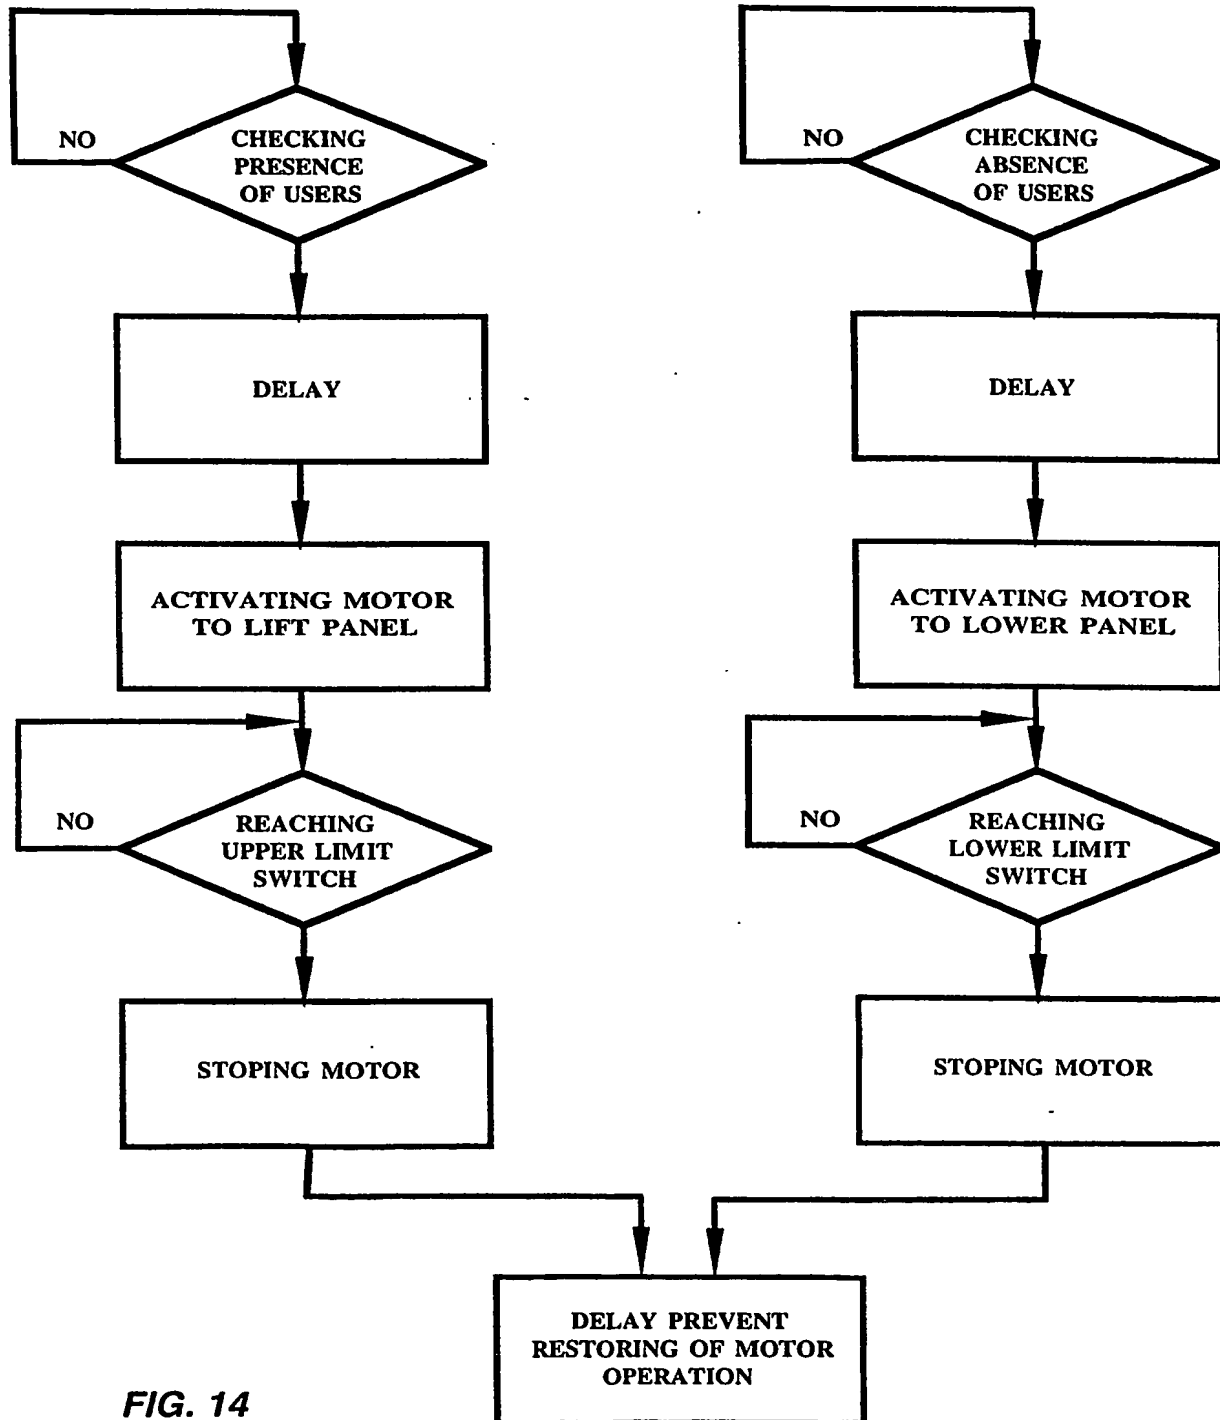


FIG. 14

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.